

## Schib CO 50



### Features

- Hygienic and easy-to-clean design suitable for a wide range of industries (both food and non-food products)
- Flexible and reliable
- Fast format changeover with minimal downtime
- 7" color touch screen offering user-friendly HMI functionality
- Icon-based operator interface with real time diagnostics
- 500 mm film width (700 mm as an option)
- All product contact parts are made of stainless steel or food grade plastic
- Stainless steel version on demand
- Independent temperature control circuits incorporated into the control panel
- Product-specific infeed and automatic feeders are available on demand

## Schib CO 50

The Schib CO 50 is a new generation horizontal flow wrapper suitable for a wide range of primary or secondary packaging applications. It offers compact construction, ergonomic and easy-to-clean design, as well as great flexibility and reliability.

The machine comes with top or bottom unwind, speeds up to 200 ppm, 3-axis drive configuration and the choice of Rotary, D-Cam or long-dwell jaws. Allen-Bradley controls are an available option.

Further options include twin jaws configuration, automatic film splicer, motorized film pre-feed, reel run out sensor, pre-printed film registration, no product – no bag function to minimize film waste, gusset tucking, Euro-slot, remote service device, and many other accessories.

Automatic feeders and product conveying/handling devices are also available on demand.

Feature	Standard	Optional
Min./Max. product dimensions	Length 50 / 480 mm Width 5 / 200 mm Height 1 / 120 mm	Length > 1500 mm Width 5 / 300 mm
Performance	200 ppm	
Film roll width and max. ext. dia	500 mm / 350 mm	700 mm / 350 mm
Drive	3 axis	
Sealing head	Rotary jaws	D-Cam
In-feed conveyor useful length	1500 mm	On request
Automatic film splicer	No	Yes
Control panel	7" color touch-screen	
Program memory	40 programs	Expandable
Diagnostics	Yes	
Machine finishing	Painted RAL 9007	Stainless steel
No product - no bag	No	Yes
Wrapping materials	Heat sealable OPP - BOPP - COEX - Laminate	LDPE - HDPE - Polyolefin - Cold sealable films
Installed / absorbed power	4 / 1.5 kW	
Weight	800 kg	
Feeding system	Manual	Automatic
Machine dimensions	4000 x 1200 x H 1750 mm	
We reserve the right to make technical changes without prior notice.		



Tray Wrapping



Slug Wrapping




Automatic Feeder (option)

BW Flexible Systems  
225 Spartangreen Blvd.  
Duncan | SC | 29334  
UNITED STATES  
t. +1 (864) 486 4000  
[bwflexiblesystems.com](http://bwflexiblesystems.com)

BW Flexible Systems UK Ltd.  
101 Lilac Grove | Nottingham | NG9 1PF  
UNITED KINGDOM  
t. +44 (0) 115 967 8787  
[bwflexiblesystems.com](http://bwflexiblesystems.com)

Hayssen Flexible Systems S.r.l.  
Via Trieste, 53 | Mestrino (PD) | 35035  
ITALY  
t. +39 049 9006511  
[hayssen.com](http://hayssen.com)

Schib Packaging S.r.l.  
Viale del Lavoro, 7/9 A  
Monte di Malo (VI) | 36030  
ITALY  
t. +39 0445 602300  
[schib.it](http://schib.it)

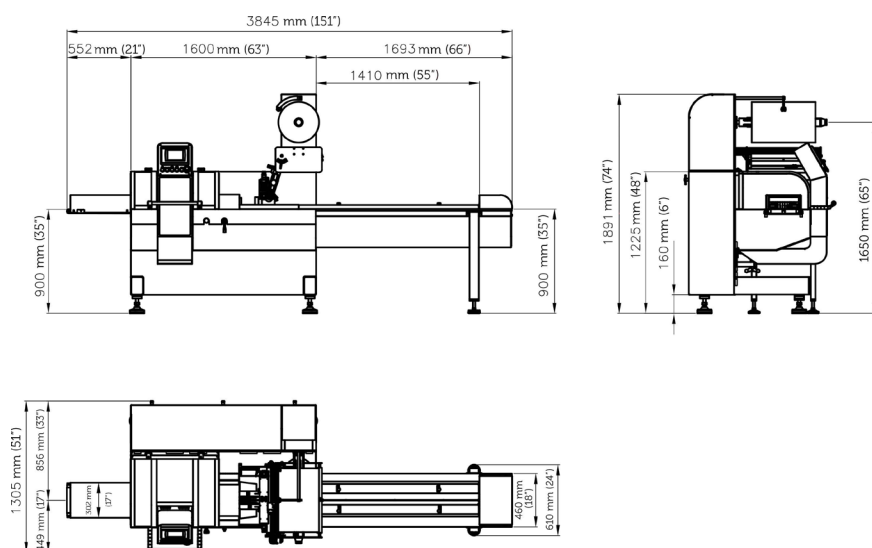

Hayssen | Hudson-Sharp | Rose Forgrove | Sandiacre | Schib | Simionato | Symach | Thiele

BW Flexible Systems is a global manufacturer of packaging systems that fill and bag thousands of food and non-food products. Our packaging systems are designed and manufactured to maximize the efficiency and lifetime value of our customers' packaging lines. Our range of machinery includes form-fill-seal, feeding, bag filling and sealing, pouch-making equipment, flow-wrap, reclosable packaging solutions, palletizing, stretch-wrapping and more. For more information, go to [bwflexiblesystems.com](http://bwflexiblesystems.com)

barrywehmiller  
**bw**  
betterworld