

SAM 022818

UNIMAG Type PFA-40

Group Lubrication device
Manufacturer UNIMAG
Type PFA-40
Etat new



Total Capacity 120 l
 Capacity 40 l/min
 Paper filter width 500 mm
 Paper filter length 90 m
 Pump motor installed power 25 W
 Dimensions:
 Length 1200 mm
 Width 720 mm
 Height 660 mm



**PFA
PAPER FILTER**

FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50µ, 10µ and 15µ.
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.


Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

APPLICATION:

1. Surface Grinding Machine	5. Small Grinding Machine
2. Center Grinding Machine	6. Gear Grinding Machine
3. Internal/External Grinding machine	7. Planer
4. Honing machine	

DIMENSION DIAGRAM

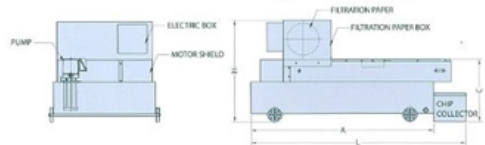

SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL. (L)	L	A	B	C	H	H	PUMP (P-F) HP	OUTLET	MOTOR	FILTER PAPER	WHEEL
PFA-20	20	100	1050	850	800	400	720	600	1/8	PF1/2"	25W		
PFA-40	40	120	1300	1050	800	400	720	600	1/8	PF1/2"	25W	W: 100MM	
PFA-60	60	140	1350	1150	800	400	720	600	1/8	PF1/2"	25W	L: 90M	
PFA-80	80	160	1500	1300	800	400	720	600	1/8	PF3/4"	25W		WHEEL
PFA-120	120	210	1900	1300	800	400	920	740	1/2	PF3/4"	40W	W: 100MM	
PFA-160	160	260	1900	1600	800	400	920	740	1/2	PF3/4"	40W	L: 90M	
PFA-240	240	440	1550	1350	1060	450	1330	740	1	PF1"	60W	W: 100MM	NO
PFA-300	300	640	2150	1950	1060	450	1330	740	1	PF1"	90W	L: 90M	WHEEL
PFA-500	500	960	3340	2500	1060	450	1330	740	1.5	PF1.5"	60W	L: 90M	WHEEL